

# Reveal bead with mesh EJOT® Pro GAP Active Flex

**GAP09-AF/01: 8803040011 | GAP09-AF/02L: 8803040006**

### Application

Reveal bead with mesh for creating an exact, aligned and perpendicular plaster finish on windows and doors.

### Properties

Increased three-dimensional movement absorption thanks to highly flexible foam; driving rain-proof connection; precise and clean plaster finish; easy to apply; integrated transfer adhesive tape for attaching the masking film; no subsequent cleaning work

### Storage and transport

lying on the entire surface; dry and frost-free; not above 50 °C; no direct sunlight

Dimensions and packaging	
Bar length [m]	2.4
Pieces / cardboard box	30
Running meter / cardboard box	72
Cardboard box / pallet	44
Running meter / pallet	3,168
Pallet height [m]	1.3

Proofs/classification	
<b>Mechanical cyclic loads</b>	
VDPM Basis MO-01/1 Abs. 4.2	Class C NW 01-K17-09-de-03
<b>Joint properties</b>	
MO-01/1 section 5.4	Requirement fulfilled NW 01-E03-020310-en-01


Basic profile	
Raw material	Rigid and soft PVC – free from lead and cadmium – REACH compliant
Tolerances	Profile general tolerances 2A according to DIN 16941
Colour fastness	According to DIN EN 20105-A03 – compliance level 2

Mesh	
Glass fiber fabric	R131 or comparable (certified on the basis of EAD 040016-01-0404 / EAD 040083-00-0404)
Fabric grammage [g/m²]	160
Mesh size [mm]	4 x 4
Fabric colour/print	White neutral
Fabric width [cm]	12.5 ± 5 %
Fabric fastening	welded


PE foam tape 1	
Dimensions [mm]	1 x 9

PE foam tape 2	
Dimensions [mm]	3 x 5.5

Transfer tape	
Dimensions (width) [mm]	12.5
Temperature resistance [°C]	80

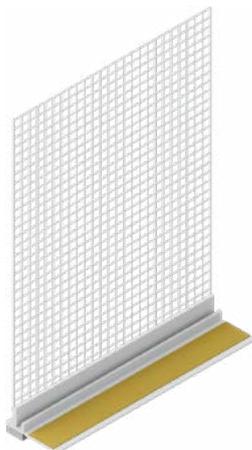

GAP09-AF/01: 8803040011

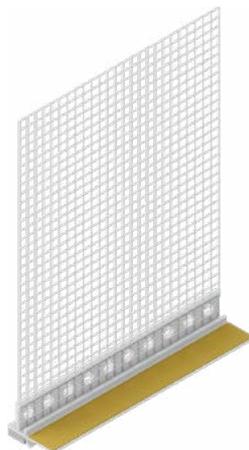

GAP09-AF/02L: 8803040006